



DATA SHEET

Integrated Access Gateway

Integrated Access Device: Firewall & Router

VoIP Gateway: SIP, ISDN, PSTN

Access technologies: Telco, IP, GSM/LTE

Upgradable to 3CX PBX package



Features


- 19" Rack mount unit
- SIP trunks: 4 * G.729a/G.711 CODEC's (upgradable to 8, 12, 16, 24, ...32)
- Telephony hardware:
 - 0, 2, 4, 6, or 8 Analogue (FXS or FXO)
 - 0, 4 or 8 Basic Rate ISDN (TE or NT mode)
 - 0, 1 or 2 Primary Rate ISDN (TE or NT mode)
- WAN ports:
 - Ethernet
 - 1 or 2 LTE (cat 4 or 6)
- LAN ports:
 - Ethernet, 2 * USB2.0 (1 * OTG / Host, 1 * UART)
 - WiFi Access Point or Client
- Network Protocols and Services: PPP & PPPoE, HDLC, IPv4, DNS, VPN, VLAN, NTP, SSH, HTTPs
- Routing: Static, NAT, NAT traversal, Port Forwarding, SIP ALG
- Firewall: Policies, Access Control Lists, Inbound/Outbound Filters, DMZ
- SIP Gateway features: B2B User Agent, Call Recording, T.38 fax, Announcements, register 2 PBX extensions
- QoS:
 - Enhanced Class of Service: DSCP and 802.11p
 - "ViBE" integration, www.voipex.co.uk
- Call Recording "Call Manager": 30,000 minutes on device (expand via 32GB or 64GB mini SD card)
- Web-based GUI: User friendly, install and configuration "wizard"
- Software upgrade: 3CX PBX software package
- ICASA type approval: TE-2011/192

DATA SHEET

Ordering Information

Part Number Generator

The Wanderbox is modular, with the ordering code made up as follows.

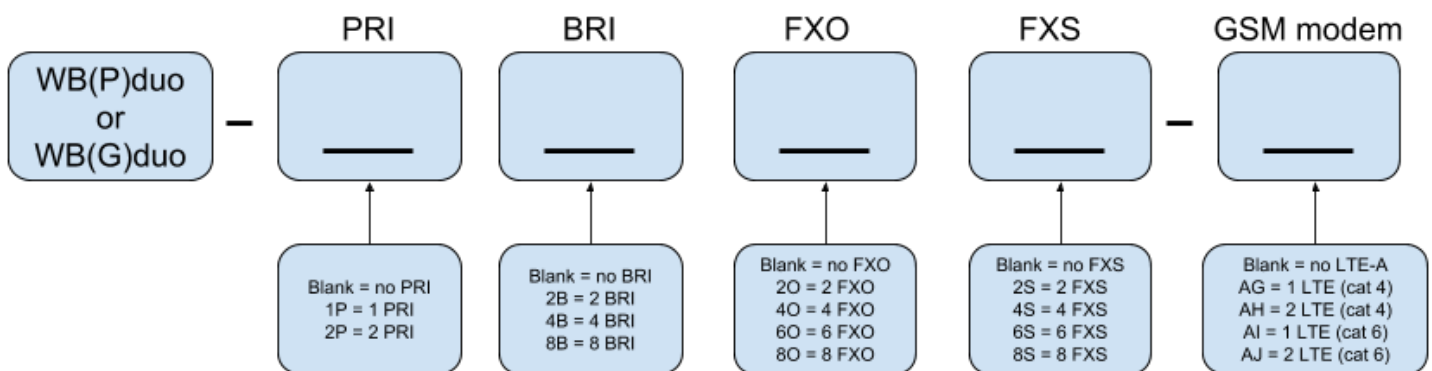

Note:

WB(G) defines SIP Gateway feature set support, with optional PBX license upgrade

PRI, BRI, FXS, FXO, WiFi interface technical specifications within the Wanderbox “Quick Start” and “Installation Guide”

Example part number variants (other options are available)

WB(G)duo-SX	SIP Gateway, 2 Ethernet
WB(G)duo-SX-AH	SIP Gateway, 2 Ethernet, 2 * LTE cat 4
WB(G)duo-4O-AI	SIP Gateway, 4 FXO, 2 Ethernet, LTE cat 6
WB(G)duo-4B-AG	SIP Gateway, 4 BRI, 2 Ethernet, LTE cat 4
WB(G)duo-4O4S	SIP Gateway, 4 FXO, 4 FXS (incl. 4FXO<-> 4FXS by-pass), 2 Ethernet
WB(G)duo-8O	SIP Gateway, 8 FXO, 2 Ethernet
WB(G)duo-8S	SIP Gateway, 8 FXS, 2 Ethernet
WB(G)duo-8B	SIP Gateway, 8 BRI, 2 Ethernet
WB(G)duo-2P	SIP Gateway, 2 PRI (incl. PRI<->PRI by-pass), 4 Ethernet
WB(G)duo-1P-AI	SIP Gateway, 1 PRI, 4 Ethernet, LTE cat 6

DATA SHEET

Technical Specifications

Host Processing Platform

CPU	ARM Cortex-A53, Quad Core, 1.6GHz
Memory	2GB DDR3
Storage	8GB NAND Flash, 16GB uSD
I/O Ports	2 * USB 2.0 (1 * OTG / Host, 1 * UART)
WAN ports	IEEE802.11b/g/n, Bluetooth, 10/100Base-Tx (RJ45), (optional) LTE-Advanced
Operating System	Ubuntu Linux 16.04 LTS

Telephony Interfaces (per unit)

	Primary Rate	Basic Rate	Analog (FXS)	Analog (FXO)
Voice Ports	30 or 60 (E1)	0, 4, 8	0, 2, 4, 6, 8	0, 2, 4, 6, 8
Note: Telephony port expansion supported via connection of Comma iTA units				
Physical	RJ-45	4 x RJ-45	RJ-11	RJ-11
Electrical	E1/G.703 120Ω T1/G.703 100Ω	S/T TE or S/T NT (software selection)	Zone dependent, software programmable DC and AC characteristics. Balanced sinusoidal ringing (3 REN)	Zone dependent, software programmable impedance matching.
Protection	Power cross Inter-building	-	Power cross Inter-building	Power cross Inter-building
Conformance	TBR 4	TBR3		TE-001 (Country-dependent)

Voice Features

Echo Cancellation	Hardware based G.165 type adaptive echo cancellation per channel Up to 32 channels at 16 ms or 32 ms Up to 16 channels at 64 ms			
Hardware Codecs	-	-	G.711 A-law or μ-law	G.711 A-law or μ-law
Software Codecs	G.711, GSM, G.729A, G.726, G.723			
Fax and Modem	Packet-network synchronization and G.711 provide transparent fax/modem support			

Signaling

Signaling System	ISDN PRI - ETSI ISDN PRI - NI-2	ISDN BRI – ETSI ISDN BRI – NI-2	Loop-start DTMF	Loop-start DTMF
Other Features	Configurable network clock synchronization	Configurable network clock synchronization	Caller ID transmission Hook flash Distinctive ring	Caller ID reception

Packet Interfaces

VoIP	SIP + RTP
------	-----------

RF interfaces (FMC)

	LTE category 6 (Advanced)	LTE category 4
Antenna Geometry	Dual Rx diversity	Dual Rx diversity
Antenna connector	2 * SMA(F)	2 * SMA(F)
Antenna gain (Omni-850)	2.5dBi	2.5dBi
Frequency range	690MHz – 2700MHz	690MHz – 2700MHz
Polarisation	Linear Vertical	Linear Vertical
SIM slot	Micro SIM	Micro SIM
GSM Frequencies	900 / 1800MHz	900 / 1800MHz
WCDMA bands	1, 3, 5, 8	1, 5, 8
LTE bands	1, 3, 5, 7, 8, 20, 26, 28, 38, 40, 41	1, 3, 5, 7, 8, 20, 38, 40, 41
Carrier Aggregation	2	Non
FDD	50Mbps (UL), 300Mbps (DL)	50Mbps (UL), 150Mbps (DL)
TDD	28Mbps (UL), 266Mbps (DL)	35Mbps (UL), 130Mbps (DL)
GSM	LTE cat 6, WCDMA 3GPP DC-HSDPA	LTE cat 4, WCDMA 3GPP DC-HSPA+
Modulation	QPSK, 16-QAM, 64-QAM	QPSK, 16-QAM, 64-QAM
Approvals	ICASA pending (Quectel EP06E – mPCIe)	ICASA TA-2017/2652 (Quectel EC25E – mPCIe)

Administration

Management	Web based GUI, including platform backup and restore
------------	--



DATA SHEET

Logging	Log (with configurable levels)
Field upgrade	Application and firmware remote update from hosted repository
Call Detail Records	MySQL database for CDR
Physical Characteristics	
Power	12VDC, 2.5A via external AC/DC adapter (supplied)
Environmental	0°C - 45°C
Dimensions	127mm x 127mm x 44mm
Mounting	Desktop
Certification	
Safety	IEC 60950
EMC	CISPR22 Class B
Other	TBR3, TBR4, ICASA TE-001 (South Africa)

Gateway Feature Set

The short list of features provided below is common across all Wanderbox Gateway platforms:

SIP Gateway Features		
<ul style="list-style-type: none"> Remote Management: <ul style="list-style-type: none"> Monitoring & Diagnostics Backup and restore Call flow analysis 	<ul style="list-style-type: none"> Networking: DHCP, DNS, NTP, HTTP, VPN, SSH, VLAN 	<ul style="list-style-type: none"> Security: <ul style="list-style-type: none"> Firewall policy Access Control lists In/Outbound filter DMZ
<ul style="list-style-type: none"> Fail2Ban security module 	<ul style="list-style-type: none"> Routing: Static, NAT, Forwarding, SIP ALG 	<ul style="list-style-type: none"> Call Recording Manager: 30,000min
<ul style="list-style-type: none"> B2BUA mode 	<ul style="list-style-type: none"> SIP / (TCP or UDP) 	<ul style="list-style-type: none"> TOS/COS: DSCP, 802.11p
<ul style="list-style-type: none"> SIP proxy registration 	<ul style="list-style-type: none"> Trunk to Trunk routing 	<ul style="list-style-type: none"> QoS: ViBE management
<ul style="list-style-type: none"> Register 2 phones (emergency calls) 	<ul style="list-style-type: none"> Outbound route configuration (LCR) and multi-level trunk fail-over 	<ul style="list-style-type: none"> Atmos compliant "Call Recording" from Call Cabinet
<ul style="list-style-type: none"> T.38 fax 	<ul style="list-style-type: none"> Budget Trunk Router (minutes/month) 	

Refer to Wanderbox brochures and Com.X Administrators Guide for feature set specification, available at: <http://farsouthnet.com/support/manuals/>